



PANEL DOOR SYSTEM

Prestige



YAWAL

aesthetics and modernity

TM 77HI PRESTIGE – SYSTEM FEATURES


- excellent aesthetics of the system due to hidden hinges, the product is available in various options:
 - with single – faced panel,
 - with double – faced panel,
- possibility of choice between type of insulation or central gasket,
- quick and easy assembly,
- possibility of using panels with all possible designs, with decorative designs of stainless steel and with decorative cuts,
- high thermal insulation properties,
- great selection of colours – RAL palette, structural colours and wooden-like colours,
- possibility of opening the door in various ways: standard key, application, fingerprint,
- possibility of creating high structures using innovative solutions.




See the product and panel door folder on the website

Picture: Examples of the system use


CROSS SECTION THROUGH
TM 77HI PRESTIGE DOOR

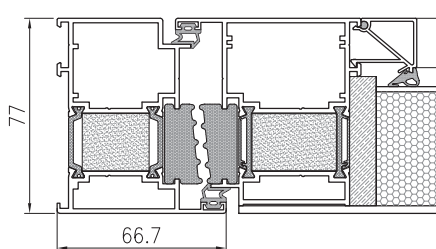

CROSS SECTION THROUGH
TM 77HI PRESTIGE DOOR

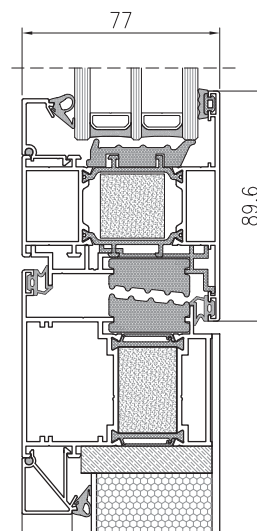

CROSS SECTION OF TM 77HI PRESTIGE
DOOR WITH TRANSOM WINDOW

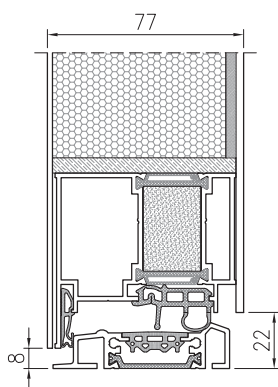

TECHNICAL PARAMETERS - TM 77HI PRESTIGE

ENERGY	Thermal insulation EN 10077-2	Uw from 0,9 W/m ² K
COMFORT	Acoustic insulation EN ISO 140-3	Rw = 33 dB
	Air permeability EN 12207	Class 4
	Water tightness EN 12208	7A
SAFETY	Wind load resistance EN 12210	Class C5/B5
	Anti-theft protection EN 1627	RC2, RC3

TECHNICAL PROPERTIES - TM 77HI PRESTIGE

Frame structural depth	77 mm
Sash/leaf structural depth	77 mm
Infill thickness	30 ÷ 77 mm
Maximum dimensions L x H	1300 x 3000 mm/ 2400 x 2800 mm
Maximum leaf weight	250 kg
Structure type	single-leaf, double-leaf doors, doors with transom window and sidelights